


# Product Data Sheet

## Railing System SG 40-S

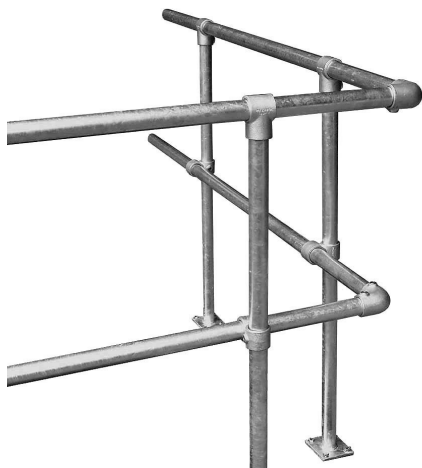

Functional and stable railing, made of galvanized steel, adapted to the Guardrail Base GB, for installation without any roof penetration and drilling.

### Technical Data

#### Railing System SG 40-S

Functional and stable railing made of galvanized steel, adapted to the Guardrail Base GB, for installation without any roof penetration and drilling.

The Railing System SG 40-S consists of:

Railing Post:	Ø 42 x 3 mm, Length ca. 1.20 m
Handrail:	Ø 42 x 3 mm, Length ca. 6.00 m
Midrail:	Ø 34 x 3 mm, Length ca. 6.00 m

Handrail Support

Midrail Support

Also available: 90°-Corner Joints, Couplings, End pieces, etc.

For detailed information please contact the ZinCo technical department.

### Features

- quick and easy installation, without any roof penetration in combination with the Guardrail Base GB
- quick on-site assembly due to system design
- user-friendly installation (no welding, plastering, sanding or drilling necessary)
- stable design, also suitable for escape routes and fall protection while working on flat roofs
- easy to repair, since the system can be easily disassembled and single components can be replaced

### Accessories

Handrail with Handrail Support



Midrail with Midrail Support



90°-Corner Joint for Handrail or Mid-rail



### Specification Suggestion

Railing system made of galvanized steel.

Posts adaptable for ZinCo-Guardrail Base GB/GB Corner, handrail of circular tube Ø 42 x 3 mm, with .... mid-rail(s) of circular tube Ø 34 x 3 mm. Delivery and installation according to manufacturer's instructions.

Running meters of railing: ..... m  
 number of posts: ..... qty  
 corners outside/inside: .... /.... qty  
 Wall connection: .... qty

Make: ZinCo Railing System SG 40-E  
 Enquiries: ZinCo Green Roof Systems Ltd.  
 Phone: +44 (0)1993 229 700