

# Product Data Sheet

## Slip Sheet TGF 20

Order No. 1020 / 1022



Material-neutral sheet, free of chemical softeners, made of high-pressure polyethylene, for the use as separation and slip layer on roofs or underground car parks.

### Technical Data

#### Slip Sheet TGF 20

UV-stabilised sheet made of high-pressure polyethylene.

Thickness: ca. 0.20 mm  
Weight: ca. 190 g/m<sup>2</sup>  
Colour: black

Water vapour permeability of air layer thickness according to German Standard DIN 52 615:  $s_d \geq 100$  m

Coefficient of sliding friction: 0.29

#### Dimensions:

Order No. 1020 ca. 8.00 m x 25.00 m  
(folded to a width of approx. 2.00 m and rolled-up)


Order No. 1022 ca. 3.00 m x 33.50 m  
(folded to a width of approx. 1.50 m and rolled-up)

### Features

- compatible with bitumen and polystyrene
- UV-stabilised
- physiologically harmless
- resistant to all natural chemicals
- vapour barrier
- quick and easy installation
- non-rotting

### Application Example

#### "Intensive Green Roof"

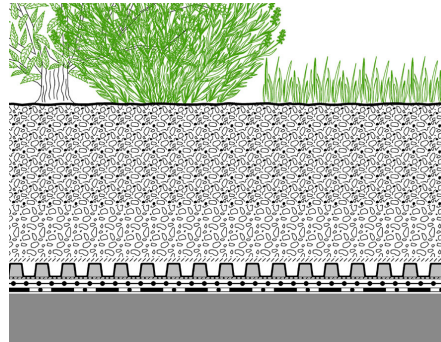

Plant layer

System Substrate "Roof Garden"

Zincolit® Plus

Filter Sheet TG

Protectodrain® PD 250

Slip Sheet TGF 20

Roof construction with root resistant waterproofing

### Specification Suggestion

Neutral membrane made of high-pressure polyethylene, thickness ca. 0.20 mm, resistant to bitumen and polystyrene, UV-stabilised, delivery and installation according to manufacturer's

instructions.

Make: Slip Sheet TGF 20

Enquiries: ZinCo Green Roof Systems Ltd.

Phone: +44 (0)1993 229 700

ZinCo Green Roof Systems Ltd.

Wittas House · 2 Rivers Industrial Estate · Station Lane · Witney OX28 4BH · United Kingdom

Phone +44 (0)1993 229700 · Fax +44 (0) 2031 631915

office@zinco-greenroof.co.uk · www.zinco-greenroof.co.uk

Life on Roofs

