

Product Data Sheet

Solar Base SB 200

Order No. 3460 / 3463 / 3465



The perfect sub-structure assembly for the installation of PV or thermal solar panels on flat roofs (up to 5° roof pitch).



Technical Data

Solar Base SB 200

Order No. 3460

Complete assembly of sub-structure, for e.g. the Solar Base Frame SGR, made of recycled hard plastic with aluminium profile underneath the plastic element.

Material:	ABS
Height:	ca. 43 mm
Weight, incl. aluminium profile:	ca. 7 kg
Filling volume:	ca. 16 l/m ²
Compressive strength at 10 % compression:	ca. 250 kN/m ²

In-plane water flow capacity (EN ISO 12958):

roof slope 1%:	ca. 1.6 l/(s·m)
roof slope 2%:	ca. 2.4 l/(s·m)
roof slope 3%:	ca. 3.0 l/(s·m)

Dimensions: ca. 1.00 x 2.00 m

Stainless steel fixing elements, thread M 10.

further Solar Base boards:

ZinCo Solar Base SB 200-Q	(crosswise installation)	Order No. 3463
ZinCo Solar Base SB 200-4	(with 4 screws for east-west-installation)	Order No. 3465

Features


- assembly without roof penetrations, green roof build-up used as superimposed load
- even load distribution
- lightweight components easy to transport
- drainage channels on the underside for optimal drainage
- completely pre-assembled base plate for quick and easy installation of support frame

Notice:

Material temperature for installation: > 5°. The Solar Base SB 200 is always to be completely covered with bulk material according to the required ballast.

Application Example

"System Build-up SolarVert®"

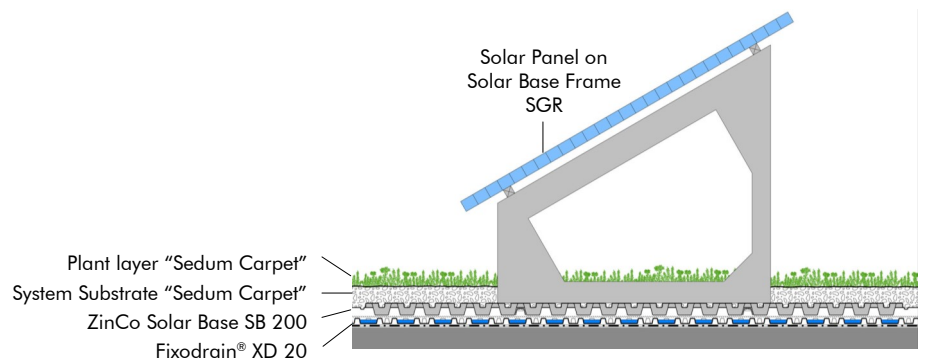

Specification Suggestion

Solar Base of recycled hard plastic (ABS), dimensions ca. 1 m x 2 m, height ca. 43 mm, water storage cells and multidirectional drainage channels, incl. integrated aluminium profiles and structurally tested for combination with Solar Base Frame, in-plane water flow capacity

tested according to EN ISO 12958, delivery and installation according to manufacturer's instructions.

Make: ZinCo Solar Base SB 200
Enquiries: ZinCo Green Roof Systems Ltd.
Phone: +44 (0)1993 229 700